B/0	客戶確認,建檔	2005/04/11

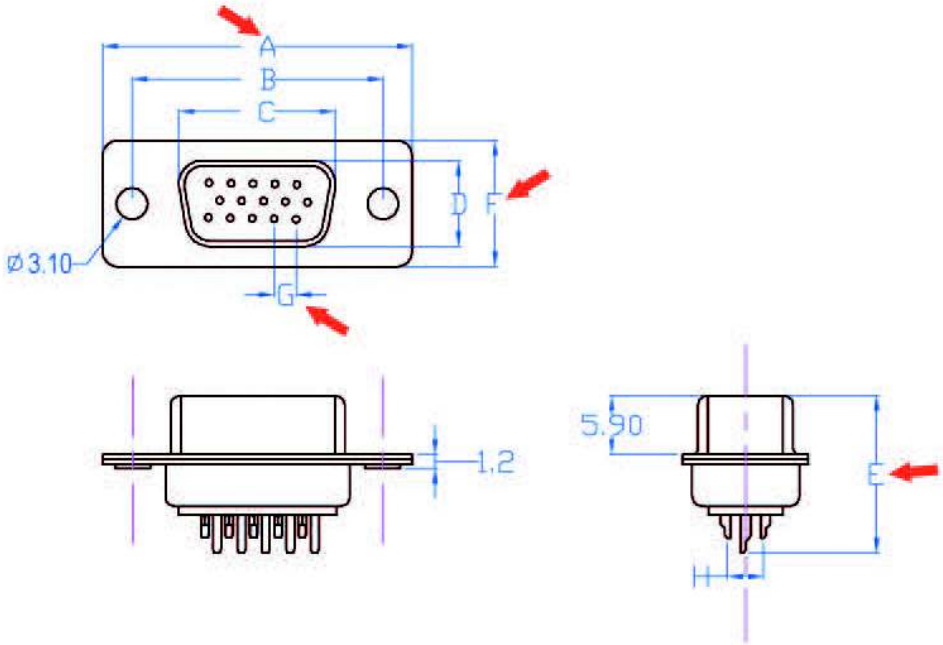

ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING:1AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE:AC 500V R.M.S
INSULATION RESISTANCE:500 MEGOHMS MINIMUM
AT DC 500V.
CONTACT RESISTANCE:30 MILLIOHMS MAXIMUM.
OPERATING TEMPERATURE:-40℃ TO +70℃.

MATERIALS:
CONTACTS:BRASS.
INSULATOR:P.B.T.UL 94V-0 RATED.
SHELL:COLD ROLLED STEEL.

FINISHES:
CONTACTS:GOLD FLASH .
SHELL: NICKEL PLATED OR TIN PLATED
OR ZINC PLATED OR GOLD PLATED OR OTHERS
PLASTIC:WHITE OR BLUE OR BLACK OR 661C OR
OTHERS.

POSITION	A±0.3	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2	G±0.2	H±0.1
HDS-15Pin	30.85	25.00	16.40	7.95	16.70	12.55	2.29	3.96
HDS-26Pin	39.25	33.35	24.70	7.95	16.70	12.55	2.29	3.96
HDS-44Pin	53.10	47.04	38.52	7.95	16.70	12.55	2.29	3.96
HDS-62Pin	69.40	63.50	54.85	7.95	16.70	12.55	2.41	3.96
HDS-78Pin	67.08	61.11	52.25	10.80	16.70	15.30	2.41	3.96

	成品	零件料號			
	料　號	前殼	后殼	膠芯	端子
	CHHDS15F01A	Nickel plated	Tin plated	Black	Gold flash
	CHHDS15F01B	Nickel plated	Tin plated	Blue	Gold flash
✓	CHHDS15F01C	Nickel plated	Tin plated	White	Gold flash
	CHHDS15F01D	Gold plated	Gold plated	Black	Gold flash
	CHHDS15F01E	Gold plated	Gold plated	Blue	Gold flash
	CHHDS15F01F	Gold plated	Gold plated	White	Gold flash
	CHHDS15F01G	Nickel plated	Tin plated	661C	Gold flash
	CHHDS15F01H	Nickel plated	Tin plated	Black	Gold plated 15u"
	CHHDS15F01I	Gold plated	Tin plated	Blue	Gold flash

Tolerances
Otherwise Stated
X. ±0.3
X.X ±0.2
X.XX ±0.1
X.XXX ±0.05
ANGULAR±2°

MATERIAL
KSDSFS03
KSDSS01
TDHDFC01
TDHDFC02
JZHDS15FP01
JZHDS15FP02

CUSTOMER P/N:

CH P/N.:

TITLE: HD 15Pin Female Connector

APP: 黃冠偉 CHK: 方少君 DRW: Z.X.Y

UNIT: mm SCALE: REV: B/0 DATE:2005/04/11